
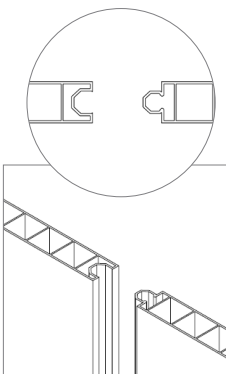


Wardfast is designed so the healthcare and construction sector can rapidly mobilise off and on site ward set ups

RAPID DEPLOYMENT HOSPITAL WARD SYSTEM

walls beds hand wash stations furniture

- Modular hygienic wall/door system
- Double doors with vision panels for patient care
- Medical grade beds inc mattress/IV mount
- Hand wash station
- Bespoke bedside lockers
- Associated hospital furniture

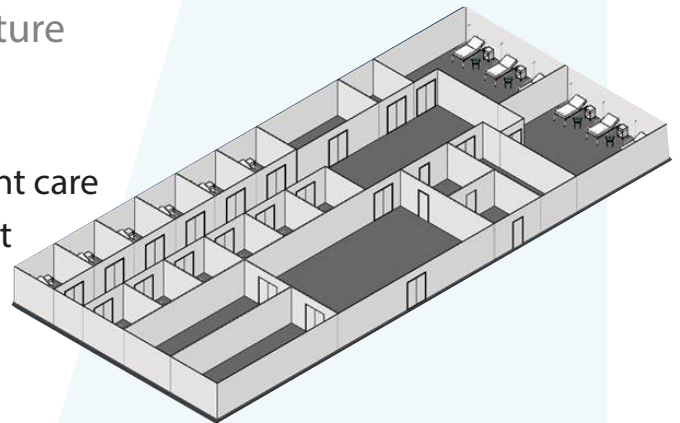

HYGIENIC
MODULAR PVC
WALL SYSTEM




MEDICAL GRADE BED INC
MATTRESS/IV MOUNT



HAND WASH STATION



BEDSIDE LOCKER
AND ASSOCIATED
FURNITURE



Modular system to
suit your needs



Quick and easy
installation



Hygienic wipe
clean panels



Reconfigurable
and relocatable

KEY BENEFITS OF WARDFAST

- Mobilisation within weeks
- Rapid on and off site set up
- Capacity planning for thousands!
- Infection control approved
- Complete layout design package
- Installation or self assembly
- 100% sustainable/recyclable walls


Wardfast walls are built using our innovative modular screening system; hygienic, quick to install and used by hospitals to temporarily segregate spaces or create rooms.

Used floor-to-ceiling (for greater infection control), our modular partition can segregate patients for short or long-term requirements.



HOARDFAST TECHNICAL SPECIFICATIONS

Material composite	85% recycled PVC, 15% Virgin PVC, grey hollow fluted internal and solid white ridged external face
Connection method	Tongue and groove click together
Panel Fire rating	BS476 Class 1 Part 7 (Spread of Flame)
Standard panel heights	1.12m, 2.25m, 2.7m, 3m, 4m, 5m
Panel width	0.5m
Panel thickness	35mm (up to 2.7m), 50mm (3m-5m)
Support options	Floor-to-ceiling; supplied with u-channel fixings

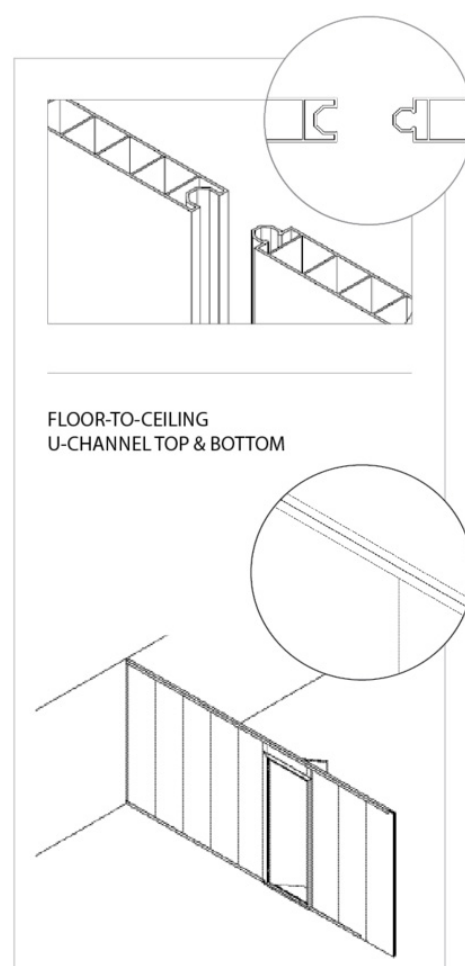

This fact sheet is for illustrative purposes only and based on the latest information at the time of print. Installation methods may vary depending on specific project requirements. Westgate reserve the right to make changes at any time without notice.